


## KirkLee Custom

---

Please input the following dimensions to help us create the perfect KirkLee for you. We are concerned with the center of the joint (pivot point) and we will “recreate you” on a virtual bike.

When you take these measurements, don't over think it. This is just one of three things (body, bike fit, existing custom bike) that we will look at to design your bike. There are checks and balances this way. You may want to do it twice and give us each measurement if you are getting discrepancies.

Finally, if you have any problems, give us a call. One of the great things about this process is you will get to know the builder and vice versa.

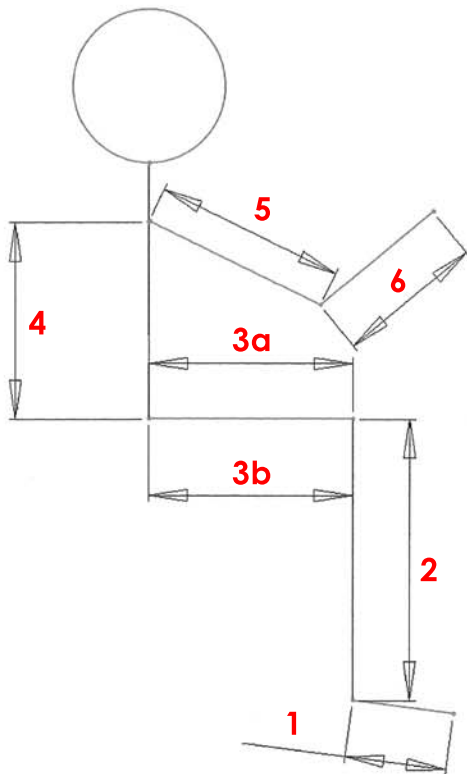

1) \_\_\_\_\_ Ball of foot to the heel measured directly below the ankle.

2) \_\_\_\_\_ Same point as #1 on the heel to the knee's center of rotation.

3a) \_\_\_\_\_ Bottom of knee cap to the hips center of rotation.

3b) \_\_\_\_\_ Knee center of rotation to the hips center of rotation.

4) \_\_\_\_\_ Hip center of rotation to the shoulder.

5) \_\_\_\_\_ Shoulder to elbow

6) \_\_\_\_\_ Elbow to the web between index finger and thumb.

7) \_\_\_\_\_ Without shoes, stand against a wall with your feet pedal width apart. Measure your inseam using a hardback book in place of your saddle.

8) \_\_\_\_\_ Total height (inches).

**Notes:**